



TYPE A

Taper optional

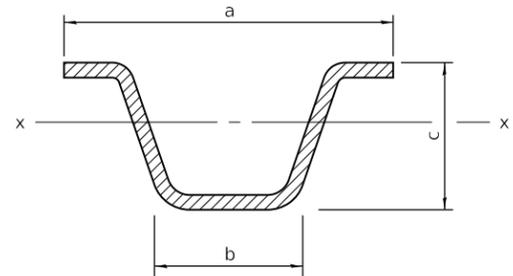


SECTION D-D

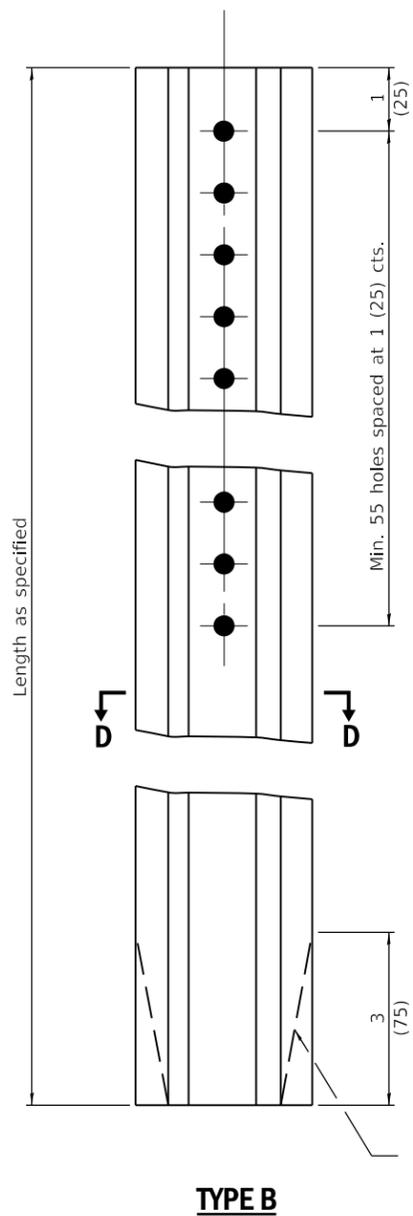


TYPE B

Taper optional

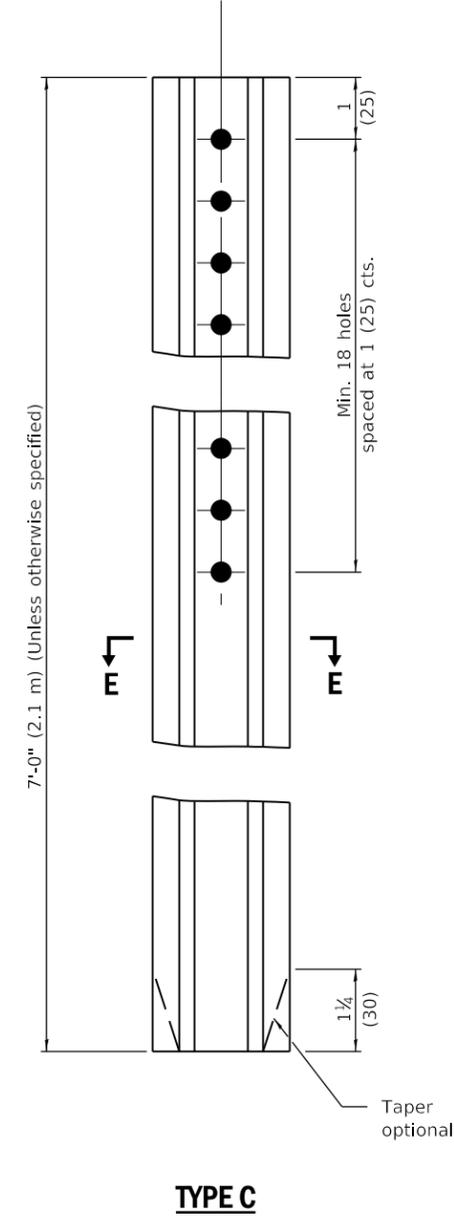

TYPE C

Taper optional

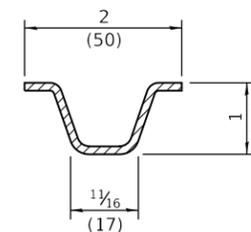

SECTION E-E

Steel - 1.12 lbs./ft. (1.67 kg/m)

| | | a | b | c | Sx-x in. ³ (mm ³) | lbs./ft. (kg/m) |
|--------|----------|----------------|---------------|----------------|--|--------------------|
| TYPE A | Steel | 3 1/16 (78) | 1 1/2 (32) | 1 1/16 (37) | 0.223 (3,654) | 2.00 (2.98) |
| | Aluminum | 3 1/2 (89) | 1 1/2 (41) | 1 1/16 (48) | 0.435 (7,128) | 0.90 (1.34) |
| TYPE B | Steel | 3 3/16 (81) | 1 1/2 (32) | 1 1/2 (38) | 0.341 (5,588) | 3.00 (4.46) |
| | Aluminum | 4 3/8 (118) | 2 1/2 (57) | 2 1/2 (60) | 0.888 (14,552) | 1.30 (1.93) |

GENERAL NOTES

Dimensions shown for cross sections are minimum.

All holes are 3/8 (10).

Sx-x is the minimum section modulus about the x-x axis of the post as shown. For posts in which holes are punched or drilled for more than half their length, Sx-x shall be computed for the net section.

All dimensions are in inches (millimeters) unless otherwise shown.

| DATE | REVISIONS |
|--------|-------------------------------------|
| 1-1-09 | Switched units to English (metric). |
| 1-1-97 | Renum. Standard 2350-4. |

METAL POSTS FOR SIGNS, MARKERS & DELINEATORS

STANDARD 720011-01

Illinois Department of Transportation

PASSED January 1, 2009

ENGINEER OF POLICY AND PROCEDURES

APPROVED January 1, 2009

ENGINEER OF DESIGN AND ENVIRONMENT

ISSUED 1-1-97