

ROAD CONSTRUCTION 1 MILE
For contract construction projects
W20-1103(0)-48
Or
ROAD WORK 1 MILE
For maintenance and utility projects
W20-1(0)-48

RIGHT LANE CLOSED 1/2 MILE
W20-5(0)-48

W4-2R(0)-48

W1-4L(0)-48

W6-3(0)-48

END WORK ZONE SPEED LIMIT
G20-1103-6036


WORK ZONE
SPEED LIMIT
45
PHOTO ENFORCED
R10-1108p-3618
SXXX FINE MINIMUM
R2-1106p-3618

L = lane width X taper ratio	
Normal Posted Speed	Taper Ratio
mph	
55	55/1
45	45/1

SYMBOLS

- Arrow board
- Work area
- Sign
- Drum with steady burn monodirectional light
- Direction indicator barricade with steady burn monodirectional light
- Type II barricade with steady burn monodirectional light
- Type II barricade, drum or vertical barricade with monodirectional flashing light
- Tubular marker
- Type III barricade with flashing monodirectional lights
- Drum

- ① Shall be repeated every 1 mile (1.6 km).
- ② Shall be repeated every 1 mile (1.6 km) in each direction in the tangent section unless concrete barrier is used.
- ③ Three Type II barricades, drums or vertical barricades at 25' (8 m) centers.

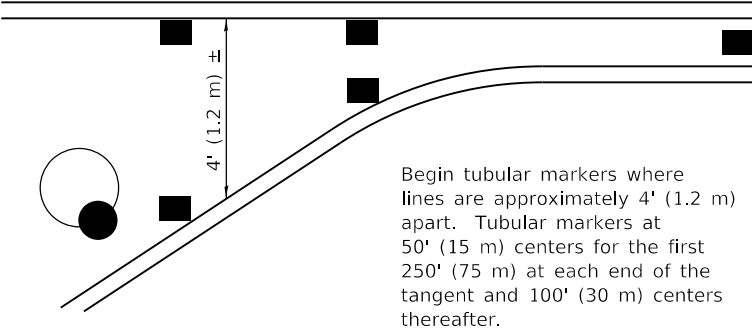

DETAIL A

Illinois Department of Transportation
 PASSED January 1, 2018
 ENGINEER OF SAFETY PROG. AND ENGINEERING
 APPROVED January 1, 2018
 ENGINEER OF DESIGN AND ENVIRONMENT

DATE	REVISIONS
1-1-18	Omitted lights on drums in tangent for westbound traffic and at work area.
1-1-17	Replaced W18-1100 plaque with W7-3a plaque. Changed flexible delineator to tubular marker.

GENERAL NOTES
 This Standard is used where at any time, any vehicle, equipment, workers or their activities require the closure of two adjacent lanes and a temporary crossover is provided by making use of one lane of pavement normally used by opposing flow of traffic and flexible delineators are used to separate the opposing traffic.
 Cones may be substituted for flexible delineators during daytime operations at half the spacing.
 All dimensions are in inches (millimeters) unless otherwise shown.

LANE CLOSURE, MULTILANE, UNDIV. WITH CROSSOVER, FOR SPEEDS ≥ 45 MPH TO 55 MPH
STANDARD 701431-13