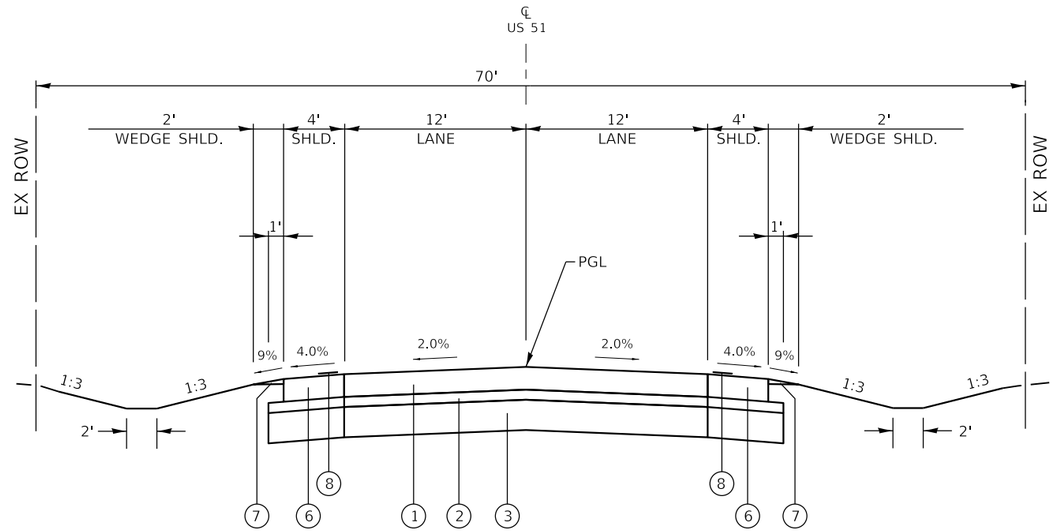

PROPOSED TYPICAL SECTION #3

TO BE USED:

STA. 138+95.00* TO STA. 141+48.13 BK
STA. -18+87.50 AH TO STA. -12+38.20

* RT STA 138+57.20

STATION EQUATIONS

STA. 141+48.13 BK/
STA. -18+87.50 AH

PROPOSED LEGEND

1. 42000401 JOINTED PCC PAVEMENT, 9"
2. 31200100 STABILZED SUBBASE, 4"
3. 31100910 SUBBASE GRANULAR MATERIAL, TYPE A, 12"
4. 60605000 COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.24, ALL TYPICALS
5. 42400200 PORTLAND CEMENT CONCRETE SIDEWALK, 5"
6. 48300400 PCC SHOULDERS, 9"
7. 48102100 AGGREGATE WEDGE SHOULDERS, TYPE B
8. 64200108 SHOULDER RUMBLE STRIPS, 8"

MODEL: Default
FILE NAME: C:\ICS4PDF\18565\12544_13\D978776-sht-typicals.dgn

HORNER SHIFRIN
WWW.HORNERSHIFRIN.COM

USER NAME = PWICS$	DESIGNED - A. RAKERS	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION
	DRAWN - A. RAKERS	REVISED -	
PLOT SCALE = 100.0000 ' / in.	CHECKED - T. GOETZ	REVISED -	
PLOT DATE = 10/2/2023	DATE - 2/8/2023	REVISED -	

TYPICAL SECTIONS
FAP RTE 322 (US 51)

SCALE: | SHEET 4 OF 4 SHEETS | STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
322	5R-2	PERRY	119	19

CONTRACT NO. 78776

ILLINOIS FED. AID PROJECT